



Goose Neck Specs


Features:

Solid brass construction

Ceramic cartridges

Easy connect Flex lines

Easy above the floor rough

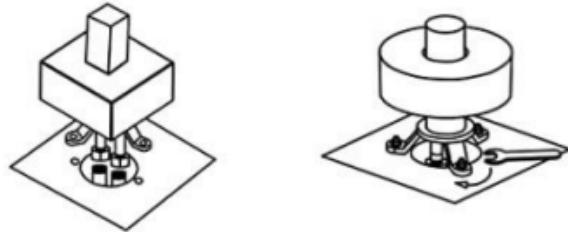

Rough two $\frac{1}{2}$ inch male adapters, just above the finished floor.

Space the adapters on 3 inch centers or less. Flex comes out of the bottom of the faucet. Brass tripod and decorative cover go over the adapters. Anti-siphon device in all handheld models. Place the center of the faucet very close to the tub. Most installations: 1-2 inches from tub edge.

